

Treatability studies on bleach effluent of pulp and paper industry by ultraviolet/hydrogen peroxide process with titanium dioxide as catalyst

L . Maria subashini*

* Assistant Professor, Bharath University, Chennai

Abstract: The treatment of bleach effluent from pulp and paper Industry for COD, colour and AOX removal was investigated using Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide. The Ultra violet / Titanium dioxide process was able to remove 48% and 37% of COD and colour. The combined process of Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide was found to be more effective in the removal of COD and organics compared with the individual processes at a pH of 7. The combined process of Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide showed the COD colour and AOX removal efficiency of 76%, 78% and 45% respectively.

Keywords: Photocatalysis, Ultraviolet/Hydrogen peroxide/ Titanium dioxide process, bleach effluent.

1. Introduction

The pulp and paper industry comes under twelve most polluting industries in India due to the huge quantity and quality of wastewater generated (Singh and Thakur, 2004). The manufacturing processes in the pulp and paper industries produce about 80 m³ of wastewater per ton of pulp produced (Almeida *et al.*, 2004). More than 250 chemicals have been identified in effluents that are produced at different stages of papermaking (Ali and Sreekrishnan, 2001).

Among the various sections in pulp and paper mills, the bleaching section is considered to be the most polluted. During this stage, chlorine or chlorine dioxide is used to bleach pulp and release chlorinated and nonchlorinated compounds from lignin and wood extractives. Typically, these effluents contain high concentrations of chlorophenolic compounds, chloroacetones and chloroform, which are colored and

recalcitrant. It has been reported that production of one ton of paper contributes 100 Kg of color imparting substances and 2-4 Kg of organochlorines to the bleach plant effluents. The high chemical diversity of these pollutants causes a variety of clastogenic, carcinogenic and mutagenic effects on fishes and other aquatic communities in recipient water bodies (Parveen Kumar *et al.*, 2011).

Worldwide, there are many existing biological and chemical treatment processes for paper and board mill effluent such as those based on aerobic, anaerobic, algal, fungal biomass, ozonation, electrochemical, photocatalysis, coagulation-flocculation treatment, etc. These classical treatments have been successful in lowering the chemical and biological oxygen demands (COD, BOD), but their applicability is limited by a great number of problems. Given the limitations of the current biological wastewater treatment, there is an increasing interest to develop a more effective treatment approach to reduce the impacts of pulp mill effluents on the environment (Marcia Regina *et al.*, 2009).

Advanced oxidation processes (AOPs) are among promising technologies that have received increasing interest for the treatment of pulp and paper bleach effluents. Advanced oxidation processes (AOPs) are used to oxidize complex organic constituents found in wastewater that are difficult to degrade biologically into simpler end products. The most common advanced oxidation processes are H_2O_2 , UV/ O_3 , O_3 , UV/ H_2O_2 and photochemical processes. Photochemical processes are used to degrade toxic organic compounds to CO_2 and H_2O , without use of additional chemical oxidants because the degradation is assisted by high concentration of hydroxyl radicals generated in the process (Metcalf and Eddy, 2004).

The objectives of the study was to treat the bleach effluent sample by Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide for the removal of Organics and Colour and to study the effects of various operational parameters such as control conditions, pH, catalyst dosage, catalyst reuse, Hydrogen peroxide concentration and contact time.

2. Materials and Methods

2.1 Bleach effluent from pulp and paper Industry

Bleach Effluent sample was collected from the Kraft process of pulp and paper industry, where the industry used sugarcane bagasse and hardwood as the raw material.

2.2 Ultraviolet/Hydrogen peroxide/ Titanium dioxide processes

A Heber immersion batch photoreactor (UV) supplied Heber scientific, Chennai with a liquid volume of 1L capacity was used. The reactor was placed in a photo chamber. A 400 W medium pressure mercury lamp with emission wavelength 365 nm was used as a light source in the photoreactor. Because temperature of the lamp influence on UV dose rate, the lamp chamber was cooled by circulated cold water and the temperature of the lamp was maintained at 20°C throughout the experiment. The cold water was supplied by the cooling water supply setup made by LAUDA GMBH & Co, Germany of type WKL 230. 1 mL magnetic stirrer supplied by Remi equipments private Ltd was kept below the sample tube for continuous stirring to get homogenous mixture. A 500 mL of wastewater sample was taken and required dosage of photocatalyst was added. Then the mixture was stirred for 5 minutes using magnetic stirrer to get a homogenous mixture. Then the sample was taken in the photoreactor. The cooling water was allowed to circulate around the UV lamp in the photoreactor. The magnetic stirrer was kept under the sample tube and switched on. The UV lamp was switched on and the photocatalysis sample was taken at required time interval. The sample was centrifuged at 2500 rpm for duration of 20 minutes.

2.3 Analytical control

All samples were submitted to colour and COD analyses. The effluent discolouration was evaluated by measuring the absorbance at 465nm, 525nm and 620nm with a UVVIS spectrometer.

3. Results and Discussions

In this work, Kraft bleach effluent treatment was done by Ultraviolet/Hydrogen peroxide/ Titanium dioxide processes for 4 hours. The wastewater was characterised for the parameters such as pH, COD, TDS, TSS, chlorides and colour as per standard methods. The wastewater has pH of 6.71, TDS of 1470 mg/L, TSS of 1524 mg/L, COD of 1035 mg/L, chlorides of 370 mg/L . The characteristics such as colour, absorbance were measured by means of UV-VIS spectrophotometer. The characteristics of the bleach effluent used in this study are described in Table1.

Table 1 Characteristics of bleach effluent from pulp and paper industry

Sl. No.	Parameter	Value
1	pH	6.71
2	BOD	835 mg/l
3	COD	1035 mg/l
4	Colour	Brown
5	Absorbance at 620 nm	0.295
6	Chloride	370 mg/l

In the Ultra violet / Titanium dioxide process the effect of TiO_2 dosage on the degradation of bleach effluent at its natural pH was studied by varying the TiO_2 dosage from 0 g/L to 1.0 g/L. The degradation of bleach effluent was determined by COD of the treated sample at various time intervals. It was found that maximum COD removal efficiency of 48% was achieved at a catalyst dosage of 1g/L for a contact time of 240 minutes. It was found that minimum of 19% COD removal efficiency takes place at a catalyst dosage of 0.4 g/L for a contact time of 240 minutes. The degradation efficiencies based on the COD removal were calculated and they are illustrated in Figure. 1. TiO_2 is capable for oxidation of a wide range of organic compounds into harmless compounds such as CO_2 and H_2O (Chatterjee and Dasgupta, 2005). TiO_2 system increased the quantum efficiencies either by inhibiting electron-hole pair recombination through scavenging conduction band electrons at the surface of TiO_2 or by offering additional oxygen atom as an electron acceptor to form the superoxide radical ion (Syoufian *et al.*, 2008).

The effect of TiO_2 dosage on the degradation of bleach effluent at its natural pH was studied by varying the TiO_2 dosage from 0 g/L to 1.0 g/L. The absorbance values of the untreated bleach effluent sample at 436nm, 525nm and 620nm was found to be 0.813, 0.494 and 0.295 respectively. The bleach effluent was treated using UV/Hydrogen peroxide process for 4 hours and the degradation of bleach effluent was determined by the percentage of Colour removal of the treated sample at various time intervals. It was seen that maximum colour removal efficiency of 56% takes place for a catalyst dosage of

0.8 g/L for a contact time of 240 minutes at 525 nm. It was seen that minimum colour removal efficiency of 23% takes place for a catalyst dosage of 0.4 g/L for a contact time of 240 minutes at 620nm.

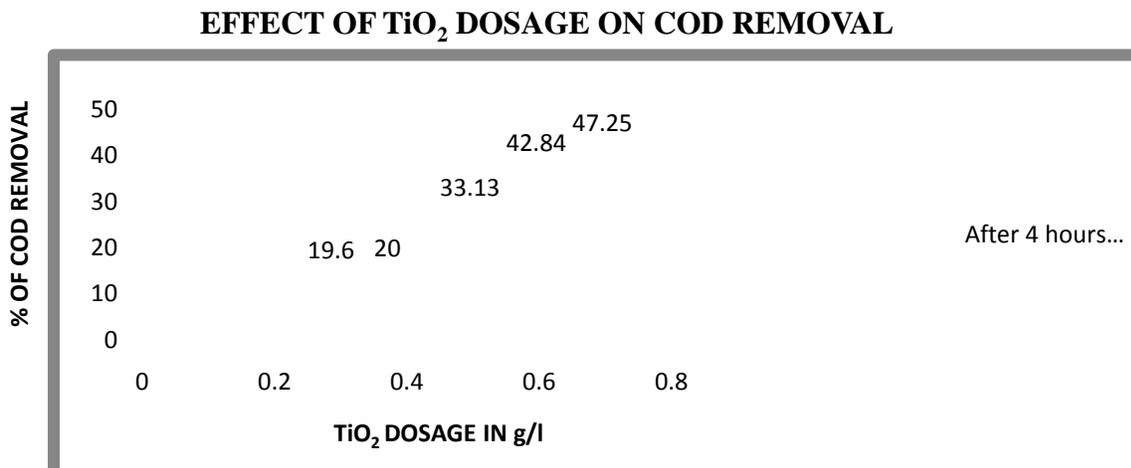


Figure .1 The effect of TiO₂ dosage on the COD removal of bleach effluent

The effect of contact time on COD removal of bleach effluent at its natural pH was studied by conducting the experiment for a contact time of 240 minutes at an optimum dosage of 1g/L and H₂O₂ concentration of 1.2 mL/L. Degradation of bleach effluent was determined by COD of the treated sample at various time intervals. It was found that that degrade+ation efficiency of COD of the bleach effluent was found to be 40% after the first hour of treatment; it was 46% after the second hour of treatment, 59% after the third hour of treatment and 75% after the fourth hour of treatment. The degradation efficiencies based on the COD removal were calculated and they are illustrated in Figure.2. It was seen that the maximum COD removal efficiency of 75 % was observed after a contact time of 240 min.

Kumar Parveen *et al.*, (2011) have studied the decolourization of the kraft bleaching waste water with UV/TiO₂ and UV/TiO₂/H₂O₂ advanced oxidation processes. It was seen that the maximum COD removal of 75% was observed after a contact time of 240 min. Abhilasha Dixit *et al.*, (2010) have studied the photochemical oxidation of phenol and chlorophenol aqueous solutions in a batch recycle photochemical reactor using ultraviolet irradiation, hydrogen peroxide and TiO₂ (photocatalyst). The reaction was found to follow the first order kinetics and was influenced by the pH, the input concentration of H₂O₂ and the dosing amount of the TiO₂ photocatalyst. The results indicate maximum of 75% and 79% degradation of phenol and chlorophenol respectively within 90 minutes of radiation time.

The effect of contact time on colour removal of bleach effluent at its natural pH was studied by conducting the experiment for a contact time of 240 minutes at an optimum dosage of 1g/L and H₂O₂ concentration of 1.2 mL/L. The sample was collected and analysed for colour removal and the results are illustrated in Figure 2. Degradation of bleach effluent was determined by colour removal of the treated sample at various time intervals by measuring the absorbance of the treated bleach effluent sample at 436nm, 525nm and 620nm. Enhancement of TiO₂-catalyzed photodegradation of organic compounds by several inorganic oxidants was mainly attributed to the increased electron scavenging from the extra oxidant sources (Hu and Wang , 2003).

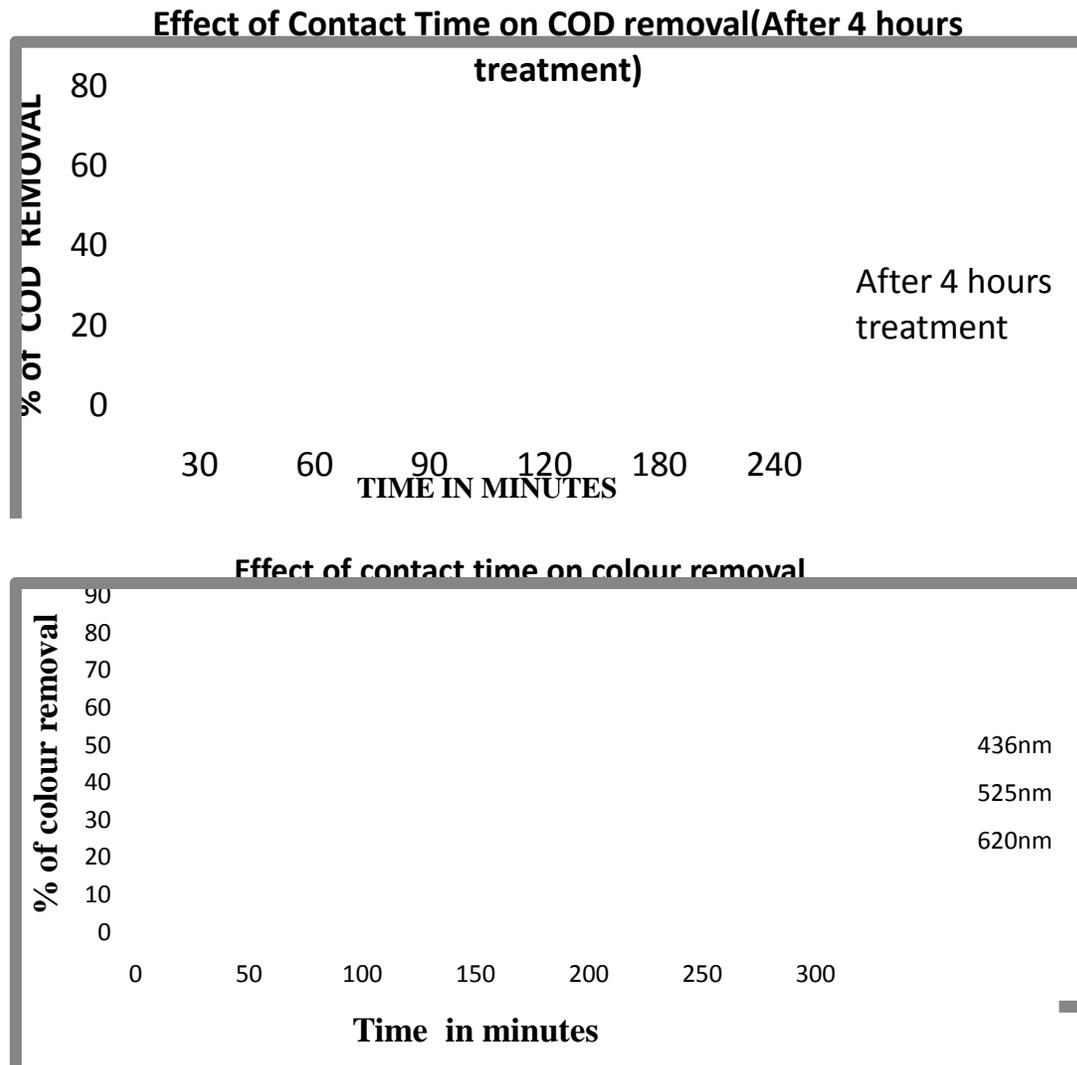


Figure .2. Effect of contact time on the removal of COD and Colour

Conclusions

Degradation of bleach effluent from pulp and paper industry wastewater is effective using Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide. At optimum conditions the maximum COD removal efficiency of 76 % and colour removal efficiency of 78% was achieved after 4 hours treatment at a pH of 7 in the Ultra violet/Hydrogen peroxide process photocatalysed by Titanium dioxide. The photocatalytic process can be considered a suitable alternative to the removal of organics and colour from the bleach effluent of pulp and paper Industry.

References

1. Almeida, Assalin E, Rosa M R, Duran N (2004), ' Treatment of industrial effluents using advanced oxidation processes in the presence of ozone', *Quimica Nova*, Vol. 27, pp. 818-824.
2. Chatterjee D and Dasgupta (2005), 'Visible light induced photocatalytic degradation of organic Pollutants', *J. Photochem. Photobiol*, Vol. 6, pp.186-205.
3. Hu C and Wang Y (2003), ' Decolorization and biodegradability of photocatalytic treated azo dyes and wool textile wastewater', *Chemosphere*, Vol.39, pp.2107-2115.
4. Marcia Regina Assalin, Edna dos Santos Almeida and Nelson Durán (2009), 'Combined System of Activated Sludge and Ozonation for the Treatment of Kraft E1 Effluent' *Int. J. Environ. Res. Public Health*, Vol. 6, pp.1145-1154.
5. Metcalf and Eddy (2004) 'Water and Wastewater Treatment' V Edition *Tata Mcgraw Hill Publication New Delhi*, pp.1196-1202.
6. Muna Ali and T.R. Sreekrishnan (2001), 'Aquatic toxicity from pulp and paper mill effluents, a review', *Advances in Environmental Research*, Vol.5, pp.175-196.
7. Parveen Kumar, Satish Kumar, Nishi K Bhardwaj and Ashutosh Choudhary (2011), 'Advanced Oxidation of Pulp and Paper Industry', *International Conference on Environmental and Agriculture Engineering*, Vol. 15, pp. 170-175.
8. Singh P and Thakur I S(2004), 'Removal of colour and detoxification of pulp and paper mill

effluent', *Journal of Scientific and Industrial Research*, Vol.63, pp.944-948.

9. Syoufian A and Nakashima K (2008), 'Degradation of methylene blue In aqueous dispersion of hollow titania photocatalyst : Study of reaction enhancement by various electron scavengers', *J. Coll. and Sci*, Vol.317 pp.512.